

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
23 June 2005 (23.06.2005)

PCT

(10) International Publication Number
WO 2005/057037 A1

(51) International Patent Classification⁷: **F16D 3/52**

(21) International Application Number:
PCT/CA2004/002094

(22) International Filing Date: 9 December 2004 (09.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/528,225 9 December 2003 (09.12.2003) US

(71) Applicant (for all designated States except US): **LITENS
AUTOMOTIVE PARTNERSHIP** [CA/CA]; 730 Rown-
tree Dairy Road, Woodbridge, Ontario L4L 5T9 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **JANSEN, Christian**
[CA/CA]; 704-4340 Bloor St. West, Etobicoke, Ontario
M9C 2A6 (CA). **ANTCHAK, John** [CA/CA]; 2015 Grand
Vista Court, Innisfil, Ontario L9S 4A6 (CA).

(74) Agents: **IMAI, Jeffrey, T.** et al.; Magna International Inc.,
337 Magna Drive, Aurora, Ontario L4G 7K1 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: SPRING TRAVEL LIMITOR FOR OVERRUNNING DECOUPLER

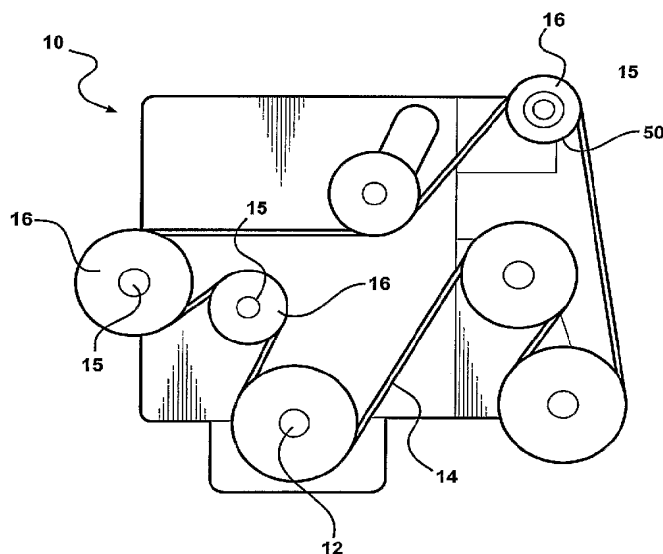

(57) **Abstract:** A decoupler assembly for transferring rotary movement between an engine driven shaft and a serpentine belt. The decoupler includes a hub configured to be assembled to the shaft. The hub has a helical first slot formed therein. A pulley is rotatably coupled to the hub. A carrier is mounted on the hub and includes a helical second slot formed therein, as well as an anti-ramp up boss formed thereon. A thrust plate is fixed to the hub and has a slot formed therein. A torsion spring is compressed between a hub end retained in the helical first slot and a carrier end retained in the helical second slot for transferring torque between the hub and carrier. The anti-ramp up boss travels within the slot formed in the thrust plate for limiting rotation between the carrier and thrust plate and preventing rotation of the torsion spring relative to the hub and carrier.



WO 2005/057037 A1

SPRING TRAVEL LIMITER FOR OVERRUNNING ALTERNATOR DECOUPLER

Field of the Invention

The invention relates to a drive shaft and belt driven component of an automotive vehicle, and more particularly, to a decoupler assembly for the allowing the belt driven component to operate temporarily at a speed different than that of the drive shaft and to decouple or mechanically isolate the driven component from the drive shaft and reduce torsional vibrations therebetween.

Background of the Invention

It is widely known in an automotive vehicle engine to transfer a portion of the engine output to a plurality of belt driven accessory components utilizing an endless serpentine belt. Typically, each component includes a pulley drivingly engaged with the belt and the belt is driven by an output pulley coupled directly to the crankshaft on the engine. The pulley of the component is rotatably mounted to a drive shaft. An example of such a belt driven accessory component is an alternator.

Internal combustion engines operate as a pulse system, constantly accelerating and decelerating and causing engine vibrations. As a result of these changing speeds, the belt driven accessory components, which are driven by the crankshaft, are continually trying to speed up and slow down. This can result in unacceptable levels of noise and vibration along with reduced component durability due to high fluctuating loads and vibrations. Additionally, rapid engine accelerations and decelerations, such as during transmission shifts and engine startup or shutdown,

cause belt squeal from slippage between the belt and the pulley, as well as heavy impact loading on the belt.

It is known to provide a decoupler assembly operatively coupled between the pulley and the belt driven accessory component, such as the alternator, to allow the alternator drive shaft to “overrun” or rotate at a faster speed than the pulley and to allow the speed of the pulley to oscillate with respect to the alternator drive shaft due to oscillations in the engine speed. Examples of decouplers are disclosed in the United States Patent 6,083,130, issued to Mevissen et al. on July 4, 2000 and the United States Patent 5,139,463, issued to Bytzek et al. on August 18, 1992.

It is also known to provide a decoupler between the pulley and the belt driven accessory component to isolate vibrations therebetween reducing noise and impact loads. An example of such a decoupler is disclosed in United States Patent 6,044,943, issued to Bytzek et al. on April 4, 2000.

It remains desirable to provide a decoupler that is easier to manufacture and has better durability and functionality over conventional decoupler designs.

Summary of the Invention

According to one aspect of the invention there is provided a decoupler assembly for transferring torque between a drive shaft and an endless drive element of an automotive engine. The decoupler assembly comprises a hub configured to be fixedly secured to the shaft and extending axially between first and second ends. A pulley is rotatably mounted on the hub and adapted to be drivingly engaged with the endless drive element. A carrier is mounted about the second end of the hub and operatively coupled between the hub and the pulley for selective rotation therewith.

The carrier includes first and second sides and an anti-ramp up boss projecting from one of the sides. A torsion spring extends between the hub and carrier for transferring torque therebetween. A thrust plate is fixedly mounted on the second end of the hub and has a slot formed therein extending between first and second ends for receiving the anti-ramp up boss. The anti-ramp up boss travels within the slot between the first and second ends for limiting rotation between the carrier and the thrust plate while selectively preventing rotational movement of the torsion spring relative to the hub and carrier.

Brief Description of the Drawings

Advantages of the present invention will be readily appreciated as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings wherein:

Figure 1 is a front view of an engine incorporating a decoupler assembly according to one aspect of the invention;

Figure 2 is an exploded, perspective view of the decoupler assembly;

Figure 3 is a cross-sectional view of the decoupler assembly;

Figure 4 is yet another cross-sectional view of the decoupler assembly;

Figure 5 is a perspective view of a clutch element;

Figure 6 is a perspective view of a carrier of the decoupler assembly;

Figure 7 is a perspective view of the clutch element assembled on the carrier;

Figure 8 is an exploded, perspective view of a slotted thrust plate and carrier with an anti-ramp up boss;

Figure 9 is a perspective view of the thrust plate and carrier in an anti-ramp up position;

Figure 10 is a perspective view of the thrust plate and carrier in a torque lock up position;

Figure 11 is a perspective view of an alternative embodiment of a decoupler assembly;

Figure 12 is an exploded, perspective view of a tabbed thrust plate and carrier with an anti-ramp up slot according to the alternative embodiment;

Figure 13 is a perspective view of the tabbed thrust plate and carrier in a torque lock-up position; and

Figure 14 is a perspective view of the tabbed thrust plate and carrier in an anti-ramp up position;

Detailed Description of the Preferred Embodiments

Referring to Figure 1, an engine for an automotive vehicle is generally indicated at 10. The engine 10 includes a crankshaft 12 driving an endless serpentine belt 14, as commonly known by those having ordinary skill in the art. The engine 10 also includes a plurality of belt driven accessory components 16, such as an alternator, compressor, etc., mounted to a drive shaft 15 and driven by the belt 14. A pulley 50 is operatively coupled to each of the belt driven accessory components 16 for driving the components 16 via rotation of the pulley 50. Described in greater detail below and shown in Figure 2, a decoupler assembly 20 is operatively assembled between the belt 14 and any one or more of the belt driven accessory components 16 for automatically decoupling the component 16 from the belt 14 when the belt 14 decelerates relative to

the component 16 and allowing the speed of the belt 14 to oscillate relative to the belt driven accessory component 16. Additionally, a detailed description of the structure and function of a decoupler assembly can be found in applicant's United States Patent 6,083,130, which issued on July 4, 2000 and is incorporated herein by reference in its entirety.

Referring to Figures 2-4, the decoupler assembly 20 includes a hub 22 having opposite first 24 and second 26 ends and a generally cylindrical body 28 extending axially therebetween. The body 28 includes opposite inner 30 and outer 32 surfaces extending between the first 24 and second 26 ends of the hub 22. The inner surface 30 includes a plurality of inner threads 33 adjacent the first end 24 for fixedly securing the hub 22 to the drive shaft 15 for mounting the belt driven accessory component 16. A reduced diameter portion 34 is formed in the first end 24. The reduced diameter portion 34 includes an outer mounting surface 36 having a smaller outer diameter than the outer surface 32 of the body 28. An abutment surface 38 opposite the second end 26 extends generally radially between the outer mounting surface 36 and outer surface 32 of the body 28. An annular thrust plate 39 is seated and fixedly secured, such as by press-fit, on the outer mounting surface 36 against the abutment surface 38. The thrust plate 39 preferably includes a slot, or notch, 43 formed on its peripheral edge to mate with a carrier 75, as will be discussed in more detail below.

A socket 40 is formed in the second end 26 for receiving a suitable tool therein for rotatably threading the hub 22 onto the drive shaft 15 for fixed rotation therewith. An annular first flange 41 extends radially outwardly from the body 28 adjacent the second end 26. The first flange 41 includes an outer flange surface 42 having a larger

outer diameter than outer surface 32 of the body 28. A generally helical first slot 46 is formed between the outer flange surface 42 and the body 28 defining a first helically ramped locating surface 48 in the annular first flange 41 terminating at an abutment wall 49 and facing the first end 24 of the hub 22..

A generally cylindrical pulley 50 is rotatably journaled to the hub 22. More specifically, the pulley 50 extends between opposite first 52 and second 54 ends. The pulley 50 includes an inner cylindrical surface 56 extending between the first 52 and second 54 ends. The pulley 50 includes an outer periphery 66 with a plurality of V-shaped grooves 68 formed therein for engaging and guiding the belt 14. A ball bearing member 57 is press fit and coupled between the pulley 50 and the hub 22. The bearing member 57 includes an inner race 58 fixedly secured to a portion of the outer mounting surface 36 of the hub 22 and an outer race 59 secured to a portion of the inner surface 56 adjacent the first end 52 of the pulley 50. A plurality of ball bearings 55 is seated between the inner 58 and outer 59 races of the bearing member 57. The thrust plate 39 is preferably secured in place axially between the inner race 58 and hub 22 when assembled. A cylindrical bushing 60 is journal mounted between the inner surface 56 of the pulley 50 and the outer flange surface 42 of the hub 22.

Referring to Figures 2-7, a one-way clutch assembly 70 is operatively coupled between the hub 22 and the pulley 50. The clutch assembly 70 includes a clutch spring 71 and a carrier 75 operatively coupled to the hub 22. The clutch spring 71 includes a plurality of helical coils 72 extending between a bent or hooked proximal end 73 and an opposite distal end 74. Preferably, the clutch spring 71 is formed from an uncoated, spring steel material and has a non-circular cross-section to improve frictional contact with the inner surface 56 of the pulley 50. Most preferably, the

cross-section of clutch spring 71 is rectangular or square. The clutch spring 71 is fitted into frictional engagement with the inner surface 56 of the pulley 50.

Preferably, a lubricant is applied to minimize wear between the clutch spring 71 and the inner surface 56 of the pulley 50.

Referring to Figures 6-8, the carrier 75 is generally ring shaped and extends axially between opposite first and second sides 76, 78. An anti-ramp up boss 77 is formed projecting outwardly from the first side 76 of the carrier 75 and is configured to mate with the slot 43 formed in the thrust plate 39, when assembled. A hooked slot 84 is formed in the second side 78 of the carrier 75 and is configured to retain the hooked proximal end 73 of the clutch spring 71. A generally helical second slot 86 is also formed in the second side 78 of the carrier 75 defining a second helically ramped locating surface 88 terminating at an abutment wall 89 and generally opposing the first locating surface 48 formed in the hub 22.

Referring to Figures 2-4, a helical torsion spring 90 extends between a hub end 92 and a carrier end 94. The torsion spring 90 is axially compressed between the first 48 and second 88 locating surfaces for transferring torque between the hub 22 and the carrier 75. More specifically, the hub end 92 of the torsion spring 90 is retained in the first slot 46 of the hub 22 and seated against the mating helically ramped locating surface 48. Similarly, the carrier end 94 of the torsion spring 90 is retained in the second slot 86 of the carrier 75 and seated against the mating helically ramped locating surface 88. The torsion spring 90 further includes hub distal end 93 and a carrier distal end 95. The hub distal end 93 abuts the abutment wall 49 in the hub 22 and the carrier distal end 95 abuts the abutment wall 89 in the carrier 75 to transfer torque between the carrier 75 and hub 22. Axial forces due to the

compression of the torsion spring 90 retains the first side 76 of the carrier 75 in abutting engagement with the thrust washer 39. The torsion spring 90 also allows relative movement between the carrier 75 and the hub 22 to accommodate changes in the speed of the pulley 50 due to generally oscillating changes in the operating speed of the engine. The torsion spring 90 and the clutch spring 71 are coiled in opposite directions.

In prior applications of decouplers, as the torsion spring 90 winds and unwinds due to changes in engine speed, the spring 90 presses against the abutment wall 89 associated with the slot 86 formed in the carrier 75 to transmit torque from the engine. As the driving force associated with the engine reverses, as in an over run condition, the spring 90 attempts to move away from the abutment wall 89 and ramp-up the helical surface 88 as the only forces holding it in place are friction forces between the spring 90 and carrier 75 and the load contained by the compression in the spring 90 between the carrier 75 and the hub 22. Such movement of the spring 90 can cause excessive wear of the carrier 75 and lead to failure of the assembly. Additionally, the overloading of the spring 90 against the abutment wall 89 may also lead to failure of the spring 90.

To alleviate the above outlined problems, the anti-ramp up boss 77 prevents ramp-up or the relative movement of a torsion spring 90 relative to the carrier 75. Specifically, the anti-ramp up boss 77 travels within the slot 43 of the thrust plate 39 as the thrust plate 39 and carrier 75 rotate relative to each other to accommodate changes in speed of the pulley 50. The anti-ramp up boss 77 travels between opposing sides of the slot 43 which define boundaries for a torque lock up position and a ramp-up position. The anti-ramp up position is shown in Figure 9 and is

defined as the position in which the anti-ramp up boss 77 engages a second side 47, or anti-ramp up side, of the slot 43 formed in the thrust washer 39 preventing the spring 90 from backing away from the abutment wall 89 associated with the carrier 75. The torque lock up position of the carrier 75 and thrust plate 39 is shown in Figure 10 and is defined as the position in which torsional deflection of the spring 90 due to rotation is stopped by the interaction of the anti-ramp up boss 77 with a first side 45, or torque limiting side, of the slot 43 formed in the thrust washer 39.

When assembled, the spring 90 is placed about the body 28 of the hub 22 and compressed against and between the ramped locating surface 48 in the slot 46 of the hub 22 and the ramped locating surface 88 in the slot 86 of the carrier 75, as described above. The carrier 75 and thrust plate 39 are aligned such that the anti-ramp up boss 77 is seated within the slot 43 of the thrust washer 39. The bearing member 57 is then attached to hold the thrust washer 39 in place with respect to the hub 22.

A first cap 98 is assembled to the first end 52 of the pulley 50 and a second cap 100 is assembled to a flange 102 formed in the second end 54 of the pulley 50 for sealing and preventing contaminants from entering the decoupler assembly 20 and for retaining the lubricant within the decoupler assembly 20.

In operation, the engine 10 is started and the pulley 50 is accelerated and rotated in a driven direction by the belt 14 driven by the engine 10. Acceleration and rotation of the pulley 50 in the driven direction relative to the hub 22 creates friction between the inner surface 56 of the pulley 50 and preferably all of the coils 72 of the clutch spring 71. It should be appreciated that the clutch spring 71 will function even where at the onset at least the end coil 74 of the clutch spring 71 is frictionally engaged with the inner surface 56 of the pulley 50. The clutch spring 71 is helically

coiled such that the friction between the inner surface 56 of the pulley 50 and at least the end coil 74 would cause the clutch spring 71 to expand radially outwardly toward and grip the inner surface 56 of the pulley 50. Continued rotation of the pulley 50 in the driven direction relative to the hub 22 would cause a generally exponential increase in the outwardly radial force applied by the coils 72 against the inner surface 56 until all of the coils 72 of the clutch spring 71 become fully brakingly engaged with the pulley 50. When the clutch spring 71 is fully engaged with the inner surface 56, the rotation of the pulley 50 is fully directed toward rotation of the drive shaft 15 of the belt driven accessory 16. Additionally, centrifugal forces help to retain the clutch spring 71 in braking engagement with the inner surface 56 of the pulley 50.

The rotational movement of the carrier 75 in the driven direction is transferred to the hub 22 by the torsional spring 90 such that generally the carrier 75, thrust plate 39, hub 22, and the drive shaft 15 from the belt driven accessory 16 rotate together with the pulley 50. At a point where the maximum design torque (or spring twist angle) has been reached, the anti-ramp up boss 77 engages the torque lock up side 45 of the slot 43 in the thrust washer 39 in the torque lock up position described above to prevent over torque on the spring 90 and possible failure. The torque lock up position is a limit for travel of the boss 77 that oscillates between the torque limiting and anti-ramp up positions during normal operation. The boss 77 may contact the anti ramp-up side regularly during normal operation while seldom contacting the torque limiting side. Additionally, the torsional spring 90 resiliently allows relative movement between the carrier 75 and the hub 22 to dampen, or isolate, oscillations in the speed of the pulley 50 due to corresponding oscillations in the operating speed of the engine 10.

When the pulley 50 decelerates, the hub 22 driven by the inertia associated with the rotating drive shaft 15 and the rotating mass within the belt driven accessory 16 will initially “overrun” or continue to rotate in the driven direction at a higher speed than the pulley 50. More specifically, the higher rotational speed of the hub 22 relative to the pulley 50 causes the clutch spring 71 to contract radially relative to the inner surface 56 of the pulley 50. The braking engagement between the clutch spring 71 and the pulley 50 is relieved, thereby allowing overrunning of the hub 22 and drive shaft 15 from the belt driven accessory 16 relative to the pulley 50. The anti-ramp up boss 77 of the carrier 75 engages the anti-ramp up side 47 of the slot 43 formed in the thrust plate 39 in the anti-ramp up position described above, preventing the spring 90 from separating from the abutment wall 89 in the carrier 75 and selectively prevent rotation of the spring 90 relative to the carrier 75 and hub 22. The coils 72 may remain frictionally engaged with the inner surface 56 while the pulley 50 decelerates relative to the clutch assembly 70 and the hub 22. The coils 72 of the clutch spring 71 begin to brakingly reengage the inner surface 56 as the pulley 50 accelerates beyond the speed of the hub 22.

Referring to Figures 11-14, there is shown an alternative embodiment of the decoupler assembly 20 of the present invention. The alternative embodiment is identical in all respects to the first embodiment with the exception of the carrier 175 and thrust plate 139. The carrier 175 of the alternative embodiment contains an anti-ramp up slot 177 that mates with a tab 143 formed on the thrust plate 139. The slot 177 extends between a first torque lock-up side 192 and a second anti-ramp up side 193 for limiting the rotational travel of the tab 143 therein and thus the carrier 175 and spring 90 relative to the thrust plate 139. Essentially the slot 43 on the thrust plate 39

and boss 77 of the carrier 75 of the first embodiment have been transposed to the slot 177 of the carrier 175 and the tab 143 of the thrust plate 139 in the alternative embodiment. As with the previously described first embodiment, the tab 143 and slot 177 have torque lock up and anti-ramp up positions as shown in Figures 13 and 14 that correspond to those defined above.

It should be appreciated that the decoupler assembly may be coupled between the pulley and drive shaft of any accessory component 16, such as an alternator or compressor, which are driven by the endless serpentine drive element or belt 14. Alternatively, the decoupler assembly may also be coupled between the drive shaft and pulley of the crankshaft which is driven by the engine.

The invention has been described in an illustrative manner, and it is to be understood that the terminology, which has been used, is intended to be in the nature of words of description rather than of limitation. Many modification and variations of the present invention are possible in light of the above teachings. It is, therefore, to be understood that within the scope of the appended claims, the invention may be practiced other than as specifically described.

What is claimed is:

1. A decoupler assembly for transferring torque between a drive shaft and an endless drive element of an automotive engine, said decoupler assembly comprising:

a hub configured to be fixedly secured to the shaft, said hub extending axially between first and second ends;

a pulley rotatably mounted on said hub and adapted to be drivingly engaged with the endless drive element;

a carrier mounted about said second end of said hub and operatively coupled between said hub and said pulley for selective rotation therewith, said carrier including first and second sides and an anti-ramp up boss projecting from one of said sides;

a torsion spring extending between said hub and said carrier for transferring torque therebetween; and

a thrust plate fixedly mounted on said second end of said hub and having a slot formed therein extending between first and second ends for receiving said anti-ramp up boss; said anti-ramp up boss traveling within said slot between said first and second ends for limiting rotation between said carrier and said thrust plate while selectively preventing rotational movement of said torsion spring relative to said hub and carrier.

2. A decoupler assembly as set forth in claim 1 wherein said torsion spring is compressed axially between said hub and said carrier.

3. A decoupler assembly as set forth in claim 2 wherein said hub includes a helical first slot formed therein defining a ramped first locating surface terminating at an abutment wall.

4. A decoupler assembly as set forth in claim 3 wherein said carrier includes a helical second slot formed therein defining a ramped second locating surface terminating at an abutment wall.

5. A decoupler assembly as forth in claim 4 wherein said torsion spring extends axially between a hub end retained in said helical first slot and an opposite carrier end retained in said helical second slot.

6. A decoupler assembly as set forth in claim 5 wherein said torsion spring includes a hub distal end torsionally engaging said abutment wall of said hub and a carrier distal end torsionally engaging said abutment wall of said carrier for transferring torque between said carrier and hub.

7. A decoupler assembly as set forth in claim 6 further including a clutch element seated between said hub and said pulley for selectively transferring rotational torque from said pulley to said hub and enabling overrunning of said hub relative to said pulley.

8. A decoupler assembly as set forth in claim 7 wherein said clutch element includes a plurality of helical coils in frictional engagement with said pulley and an

end coupled to said carrier, said clutch element expandable against said pulley to selectively couple said hub and said pulley.

9. A decoupler assembly as set forth in claim 8 wherein said pulley includes an inner clutch surface extending between first and second ends for frictional engagement with said coils of said clutch element to selectively transfer torque between said hub and said pulley.

10. A decoupler assembly as set forth in claim 9 wherein said carrier includes a hooked first slot for receiving and retaining said end of said clutch element.

11. A decoupler assembly as set forth in claim 10 further including a bearing assembly pressed between said hub and said inner surface of said pulley for rotatably coupling said hub and said pulley.

12. A decoupler assembly for transferring torque between a drive shaft and an endless drive element of an automotive engine, said decoupler assembly comprising:

a hub configured to be fixedly secured to the shaft, said hub extending axially between first and second ends;

a pulley rotatably mounted on said hub and adapted to be drivingly engaged with the endless drive element;

a carrier mounted about said second end of said hub and operatively coupled between said hub and said pulley for selective rotation therewith, said carrier

including first and second sides and an anti-ramp up slot formed in one of said sides extending first and second ends;

a torsion spring extending between said hub and said carrier for transferring torque therebetween; and

a thrust plate fixedly mounted on said second end of said hub and having a tab projecting therefrom; said tab traveling within said anti-ramp up slot between said first and second ends for limiting rotation between said carrier and said thrust plate while preventing rotational movement of said torsion spring relative to said hub and carrier.

13. A decoupler assembly as set forth in claim 12 wherein said torsion spring is compressed axially between said hub and said carrier.

14. A decoupler assembly as set forth in claim 13 wherein said hub includes a helical first slot formed therein defining a ramped first locating surface terminating at an abutment wall.

15. A decoupler assembly as set forth in claim 14 wherein said carrier includes a helical second slot formed therein defining a ramped second locating surface terminating at an abutment wall.

16. A decoupler assembly as forth in claim 15 wherein said torsion spring extends axially between a hub end retained in said helical first slot and an opposite carrier end retained in said helical second slot.

17. A decoupler assembly as set forth in claim 16 wherein said torsion spring includes a hub distal end torsionally engaging said abutment wall of said hub and a carrier distal end torsionally engaging said abutment wall of said carrier for transferring torque between said carrier and hub.

18. A decoupler assembly as set forth in claim 17 further including a clutch element seated between said hub and said pulley for selectively transferring rotational torque from said pulley to said hub and enabling overrunning of said hub relative to said pulley.

19. A decoupler assembly as set forth in claim 18 wherein said clutch element includes a plurality of helical coils in frictional engagement with said pulley and an end coupled to said carrier, said clutch element expandable against said pulley to selectively couple said hub and said pulley.

20. A decoupler assembly as set forth in claim 19 wherein said pulley includes an inner clutch surface extending between first and second ends for frictional engagement with said coils of said clutch element to selectively transfer torque between said hub and said pulley.

21. A decoupler assembly as set forth in claim 20 wherein said carrier includes a hooked first slot for receiving and retaining said end of said clutch element.

22. A decoupler assembly as set forth in claim 21 further including a bearing assembly pressed between said hub and said inner surface of said pulley for rotatably coupling said hub and said pulley.


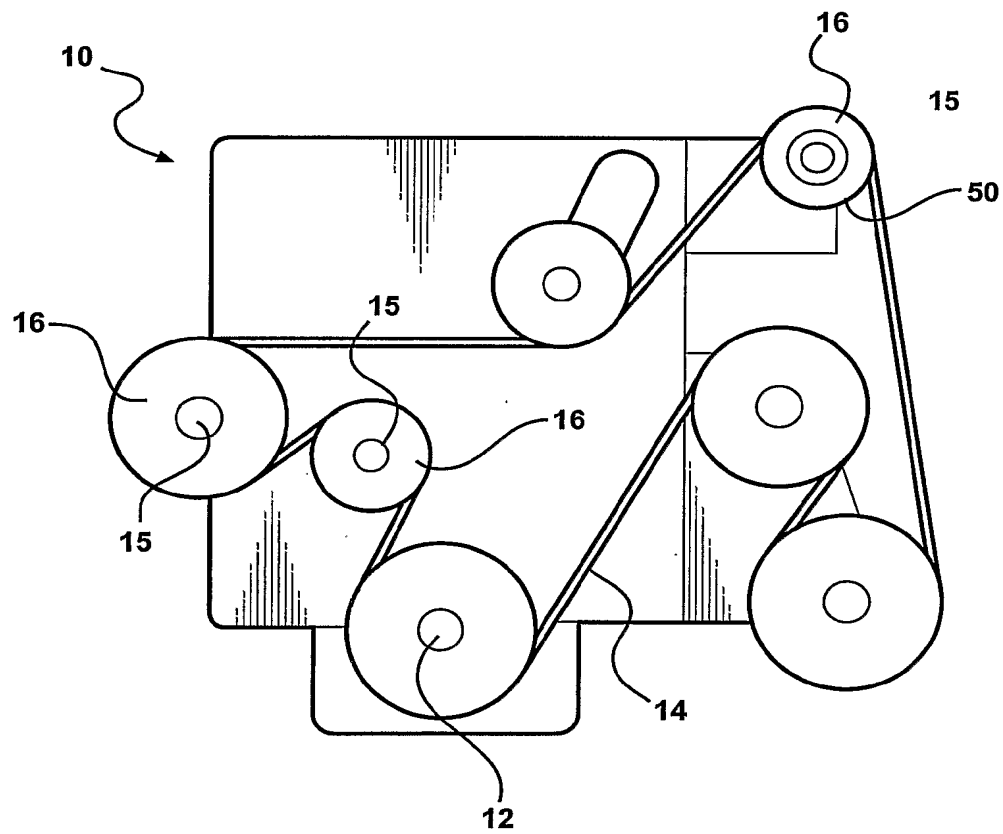


FIG - 1

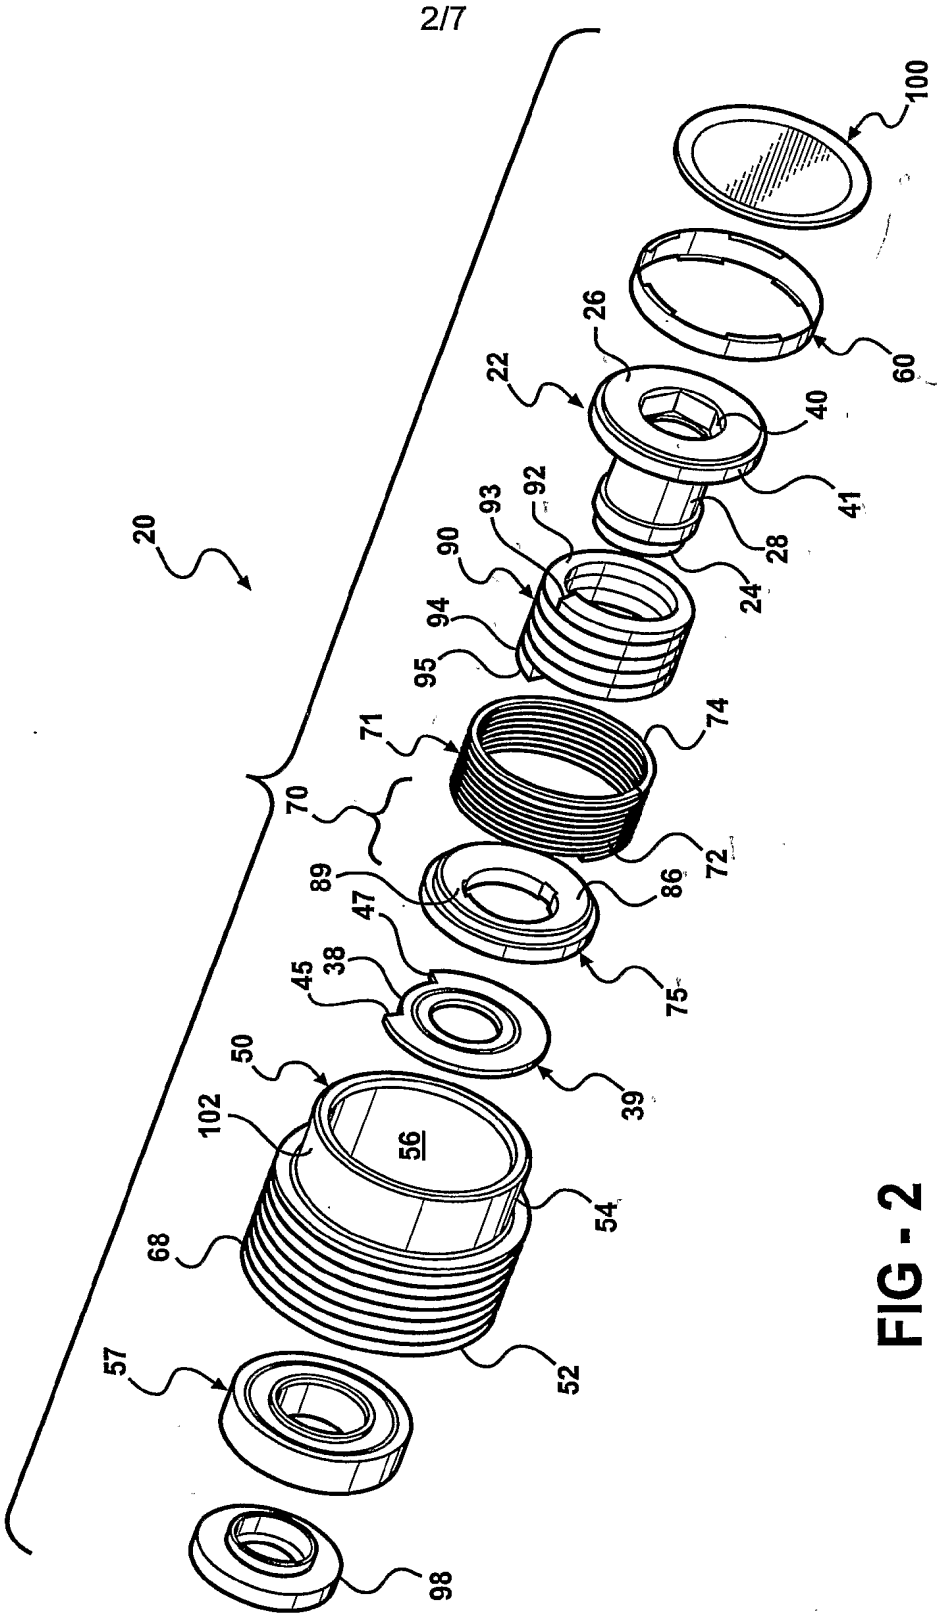

3 / 7

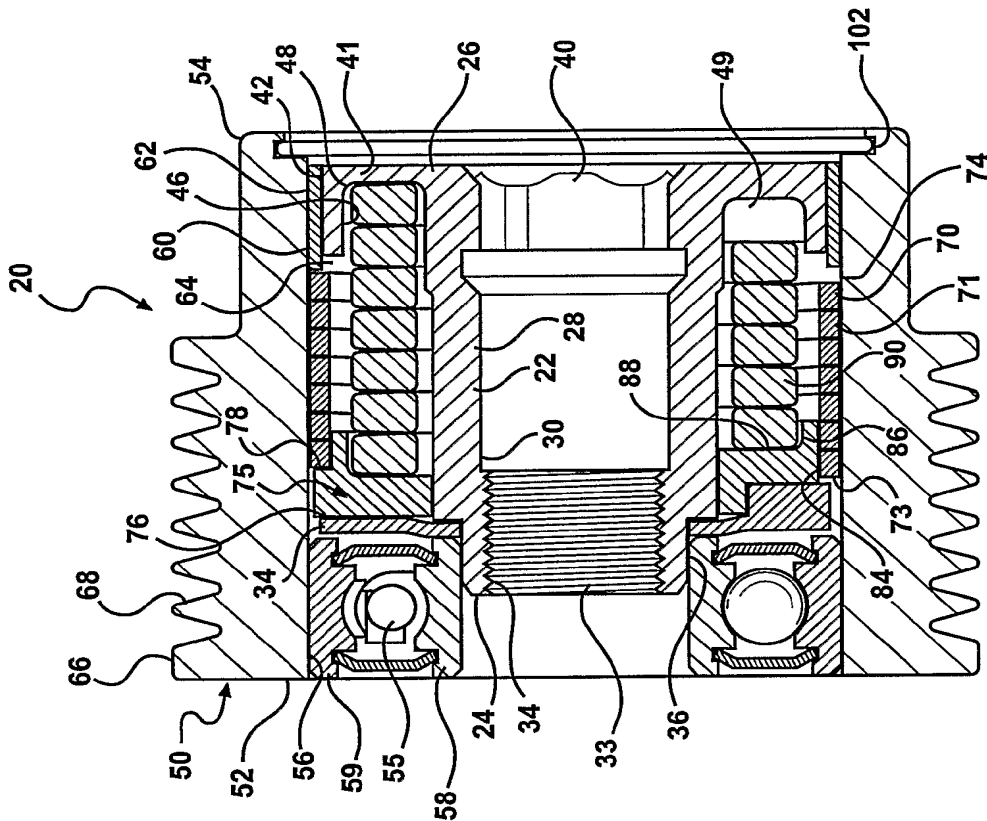


FIG - 4

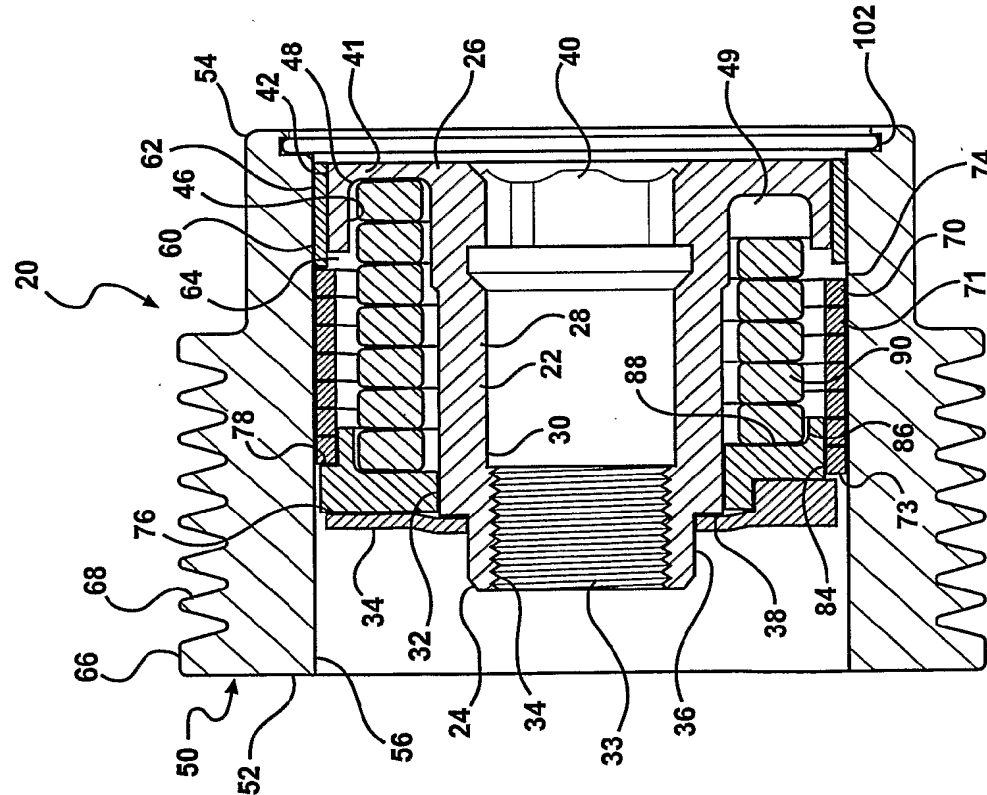


FIG - 3

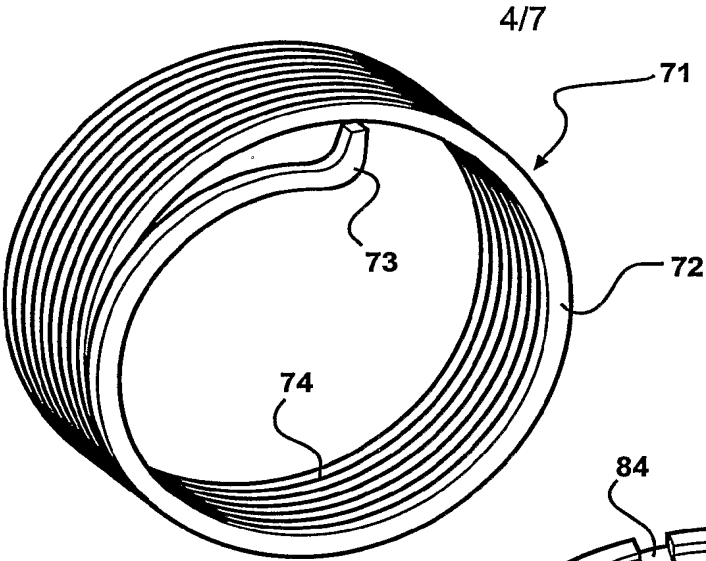


FIG - 5

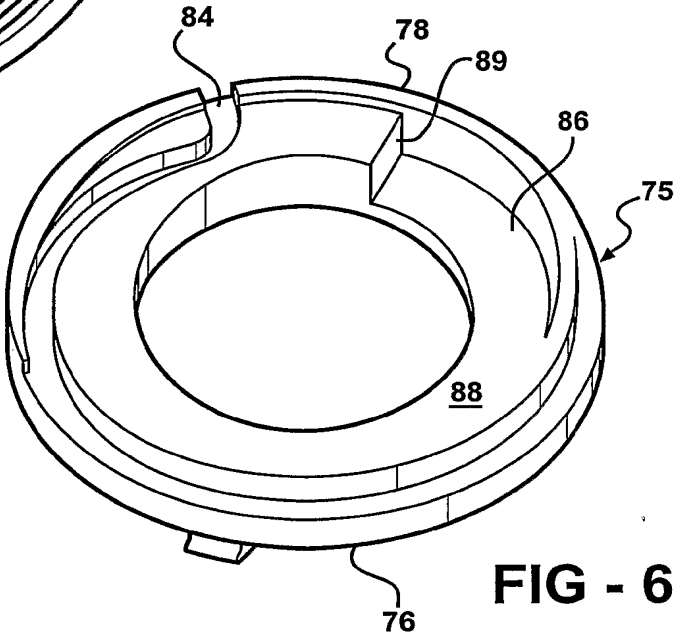


FIG - 6

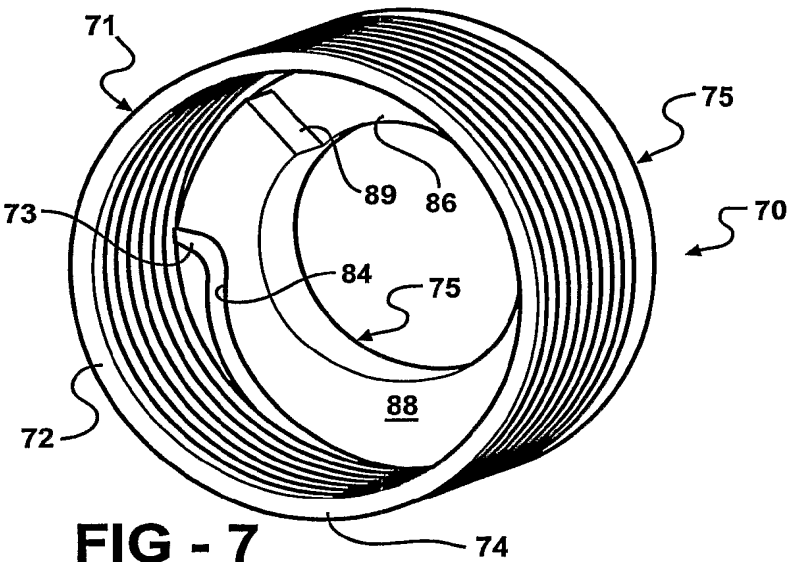
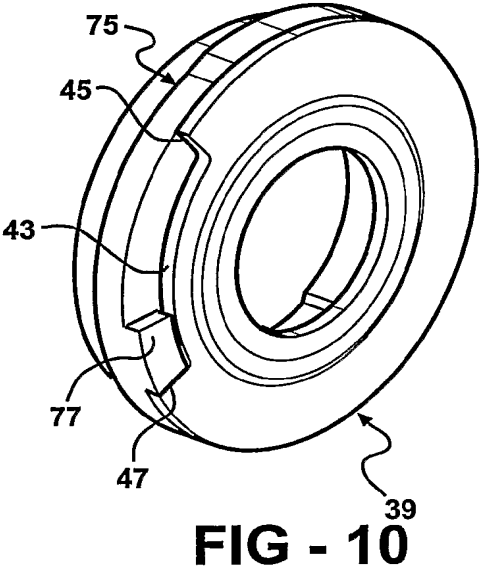
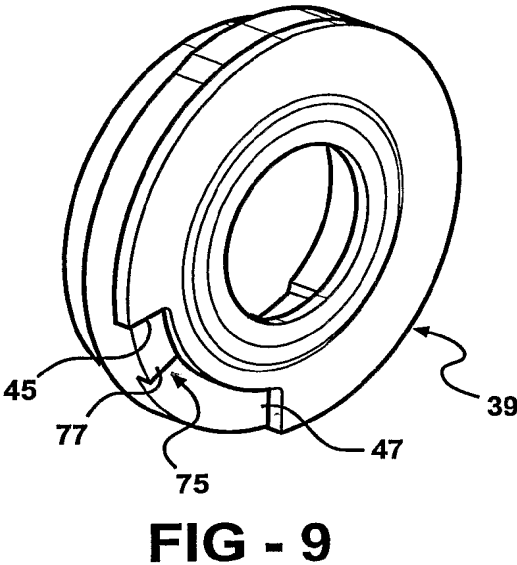
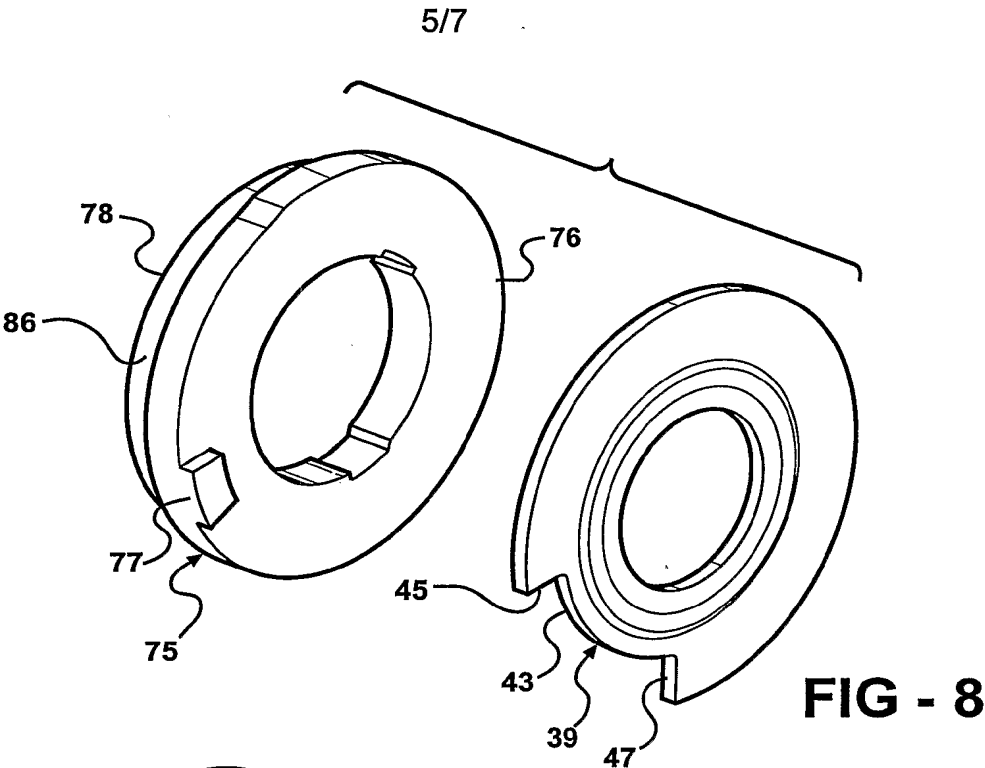


FIG - 7





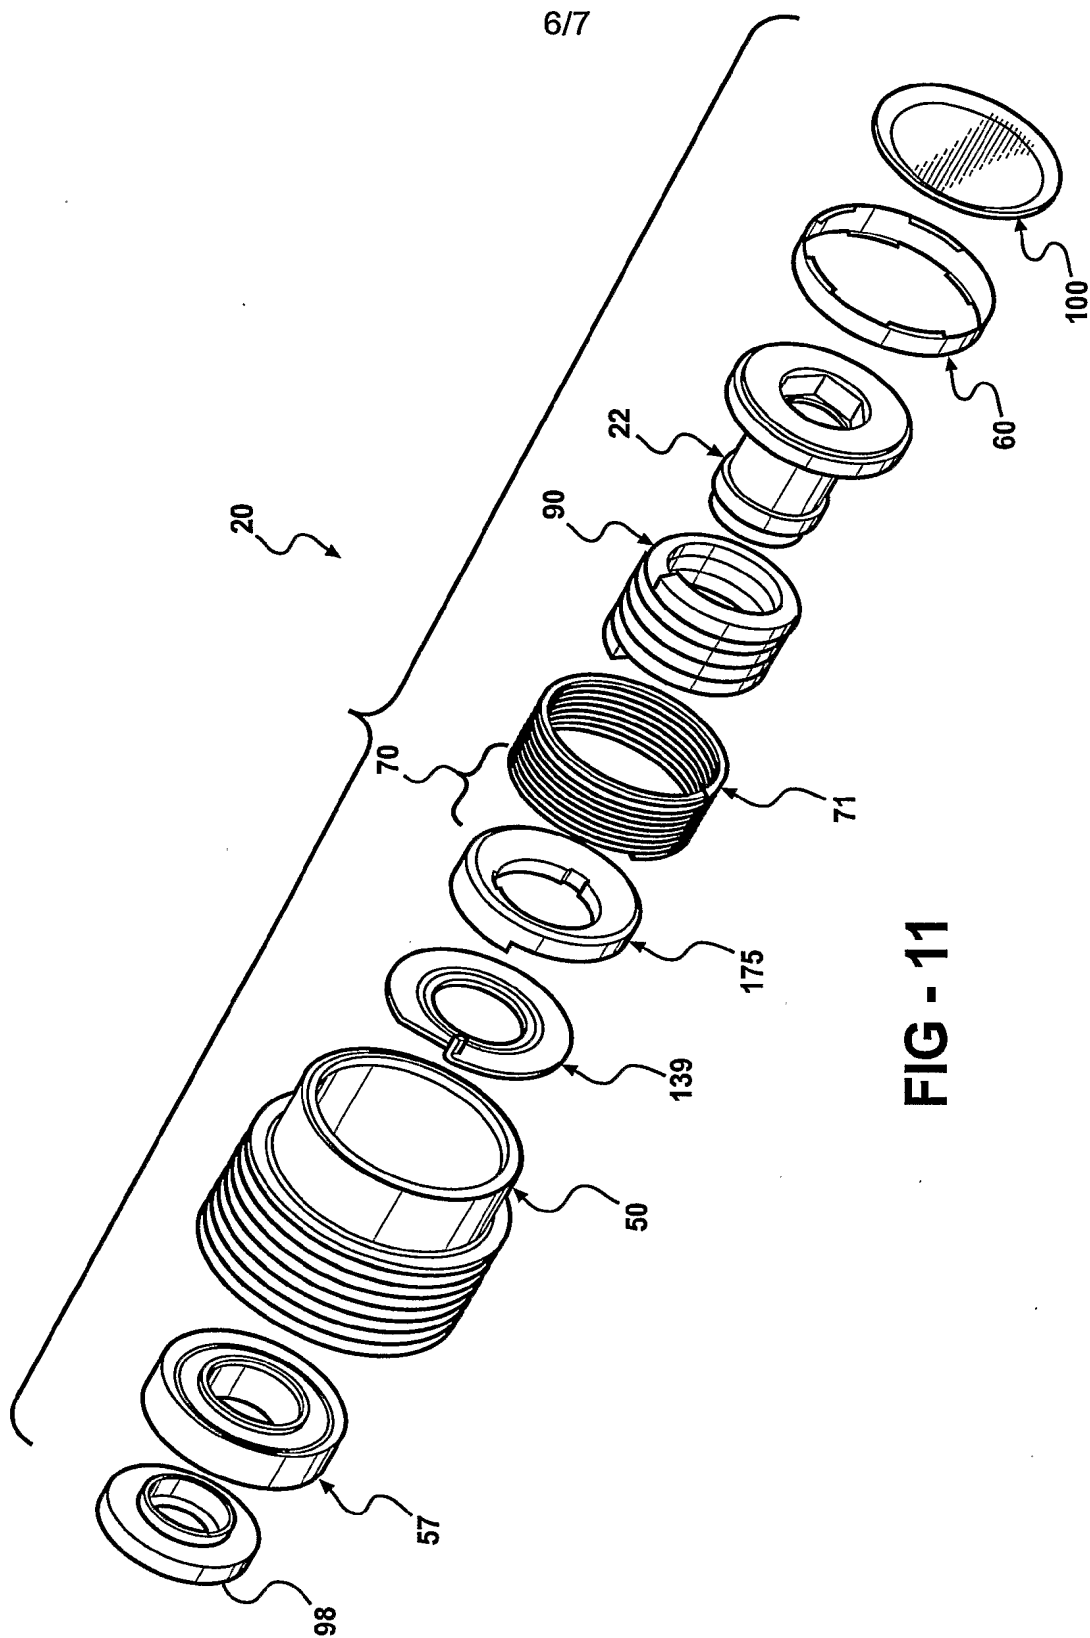


FIG - 11

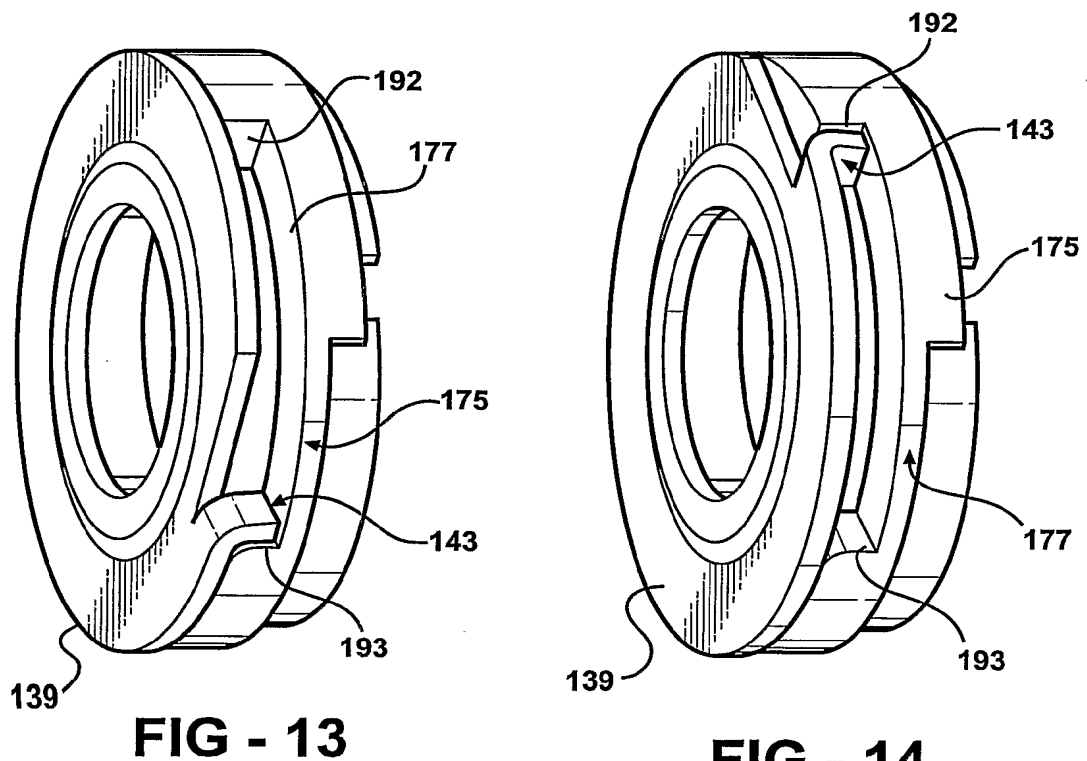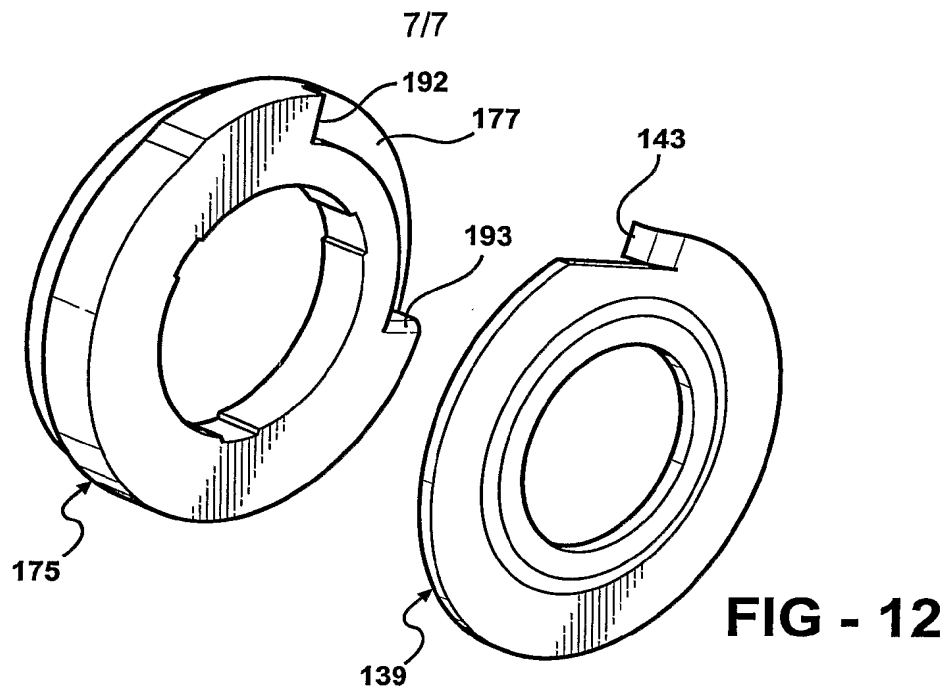

INTERNATIONAL SEARCH REPORT

International application No.
PCT/CA2004/002094

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F16D 3/52

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F16D, F16F, F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

CANADIAN PATENT DATABASE

Electronic database(s) consulted during the international search (name of database(s) and, where practicable, search terms used)

ESPACENET, DELPHION/DERWENT

Torsion, Helical, Spring, Stop, Boss, Limiter, Decoupler, Connector, Clutch, Pulley, Vibration, Damper,

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No(s).
A, P	WO 2004/011818 (JANSON et AL) 05.02.2004	1-22
A	US 6,044,943 (BYTZEK et. AL) 04.04.2000	1, 12
A	US3,618,730 (MOULD) 09.11.1971	1, 12

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :
 "A" document defining the general state of the art which is not considered to be of particular relevance
 "E" earlier application or patent but published on or after the international filing date
 "L" document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 "O" document referring to an oral disclosure, use, exhibition or other means
 "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
 "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
 "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
 "&" document member of the same patent family

Date of the actual completion of the international search
09 February 2005 (09-02-2005)

Date of mailing of the international search report
23 March 2005 (23-03-2005)

Name and mailing address of the ISA/CA
Canadian Intellectual Property Office
Place du Portage I, C114 - 1st Floor, Box PCT
50 Victoria Street
Gatineau, Quebec K1A 0C9

Authorized officer
Shawn De Salvo (819) 934-4270

Facsimile No: 001(819)953-2476

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/CA2004/002094

Patent Document Cited in Search Report	Publication Date	Patent Family Member(s)	Publication Date
WO2004011818	05-02-2004	NONE	
US6044943	04-04-2000	BR9509334 A CA2202534 A1 DE69509399D D1 DE69509399T T2 EP0782674 A1 ES2133809T T3 GB9420741D D0 JP10509497T T US6044943 A WO9612122 A1	27-01-1998 25-04-1996 02-06-1999 04-11-1999 09-07-1997 16-09-1999 30-11-1994 14-09-1998 04-04-2000 25-04-1996
US3618730	09-11-1971	NONE	